



SECTION A-A  
SCALE 1 : 15

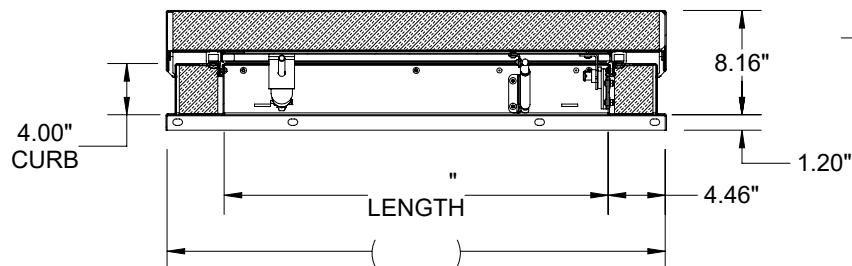

SECTION B-B  
SCALE 1 : 15

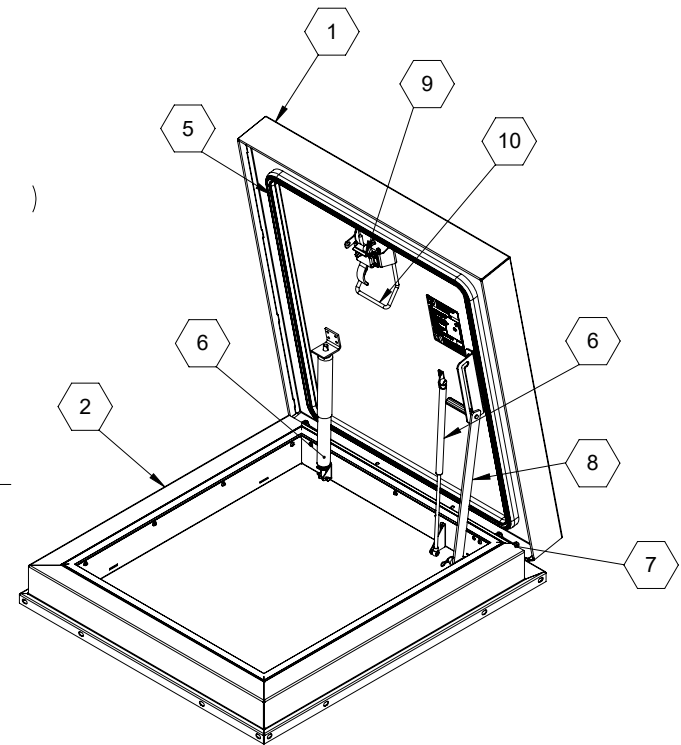

#### SPECIFICATIONS:

- ① **COVER:**  
11 GA (.090) ALUM, STIFFENED TO WITHSTAND A LIVE LOAD OF 40PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN.
- ② **CURB:** 11 GA (.090) ALUM, CURB COUNTERFLASH WITH EZ TABS.
- ③ **FINISH:** MILL
- ④ **INSULATION:** 3" POLYISO R-20 IN CURB,  
3" POLYISO R-20 IN COVER.
- ⑤ **GASKET:**  
EXTRUDED EPDM RUBBER ADHESIVE BACKED GASKET SEAL CONTINUOUS AROUND COVER.
- ⑥ **SPRING:**  
SPRINGS PROVIDE SMOOTH, CONTROLLED, COUNTERBALANCED LIFT ASSISTANCE.
- ⑦ **HINGE:** PINTLE HINGE WITH STAINLESS STEEL HINGE PINS.
- ⑧ **HOLD OPEN ARM:**  
STEEL AUTOMATIC HOLD OPEN ARM LOCKS COVER IN FULLY OPEN POSITION WITH RED GRIP HANDLE PULL RELEASE.

#### ⑨ LATCH:

STEEL SLAM LATCH, HOLDS COVERS CLOSED AGAINST 20PSF WIND UPLIFT, INTERIOR AND EXTERIOR HANDLES WITH PADLOCK HASPS.

#### ⑩ PULL HANDLE:

INTERIOR PULL DOWN HANDLE, SAFETY YELLOW POWDER COAT.


#### NOTES:



- WHEN INSTALLING ON A PITCHED ROOF UP TO 7:12, THE HINGE SIDE (LENGTH) MUST BE PARALLEL TO THE SLOPE.
- WIDTH X LENGTH DIMENSIONS ARE MEASURED INSIDE CURB TO INSIDE CURB. THE WIDTH IS HINGE TO LATCH AND LENGTH IS HINGED SIDE.

#### ROOF HATCH SIZE:

#### OPTIONS

Stainless Steel Hardware

PROJECT:				
ARCHITECT:				
CONTRACTOR:				
QTY:				
PART#:				
		TITLE:		
		9300 73rd Avenue North Brooklyn Park, MN 55428		
NAME	DATE	SIZE	DWG. NO.	REV
DRAWN		A	Babcock RH BRHRT_X_S1T ShpDr	
RELEASED		WEIGHT:	SHEET 1 OF 2	

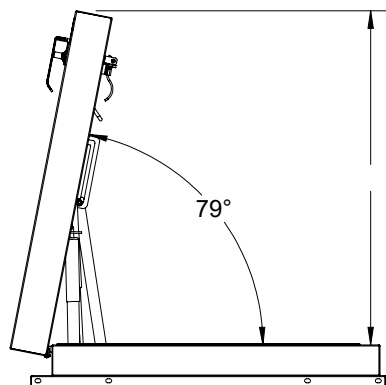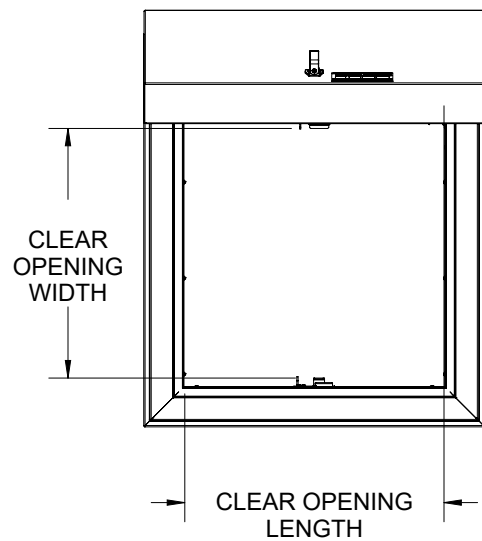

SLAM LATCH

PULL HANDLE

HOLD OPEN ARM

MOUNTING CLIPS  
FASTENERS PROVIDED  
BY OTHERS



9300 73rd Avenue North  
Brooklyn Park, MN 55428

TITLE:

	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN			A	Babcock RH BRHRT_X_S1T ShpDr	
RELEASED			WEIGHT:	SHEET 2 OF 2	