

MIAMI-DADE COUNTY

MIAMI DADE ACCEPTANCE NO: 21-1201.02 EXPIRATION DATE: 5/25/2027

TEST CERTIFICATIONS:

TITLE:

TAS201-94 IMPACT TEST - CLASS IV TAS202-94 UNIFORM STATIC AIR PRESSURE

TAS203-94 CYCLE WIND PRESSURE LOAD

BG3096

BRHUG30X96S1T

SPECIFICATIONS:

(1) COVER:

В

14 GA GALV STEEL, STIFFENED TO WITHSTAND A LIVE LOAD OF 40PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN.

- (2) LINER: 22 GA GALV STEEL
- (3) CURB: 14 GA GALV STEEL, CURB COUNTERFLASH WITH EZ TABS.
- 4 FINISH: RED OXIDE PWD
- (5) INSULATION: 1" POLYISO R-6 (5.6 LTTR) IN CURB,
 - 1" POLYSTYRENE R-4 (3.8 LTTR) IN COVER.
- 6 GASKET:

EXTRUDED EPDM RUBBER ADHESIVE BACKED GASKET SEAL CONTINUOUS AROUND COVER.

- (7) SPRING:
 GAS SPRING WITH DAMPER FOR SMOOTH, CONTROLLED, COUNTERBALANCED LIFT ASSISTANCE.
- (8) HINGE: PINTLE HINGE WITH STAINLESS STEEL HINGE PINS.
- (9) HOLD OPEN ARM:

ZINC PLATED STEEL AUTOMATIC HOLD OPEN ARM LOCKS COVER IN FULLY OPEN POSITION WITH RED GRIP HANDLE PULL RELEASE.

(10) LATCH:

ZINC PLATED STEEL SLAM LATCH, HOLDS COVERS CLOSED AGAINST WIND UPLIFT, INTERIOR AND EXTERIOR HANDLES WITH PADLOCK

11 PULL HANDLE: INTERIOR PULL DOWN HANDLE

NOTES:

-WHEN INSTALLING ON A PITCHED ROOF UP TO 7:12. THE HINGE SIDE(LENGTH)MUST BE PARALLEL TO THE SLOPE.

- WIDTH X LENGTH DIMENSIONS ARE MEASURED INSIDE CURB TO INSIDE CURB. THE WIDTH IS HINGE TO LATCH AND LENGTH IS HINGED SIDE.

ROOF HATCH SIZE 30" (WIDTH) x 96" (LENGTH)

babcockdavis[®] Roof Hatch, Personnel, 30x96, S Dr, Zinc Hdw, Galv, Red Oxide Pwd, 9300 73rd Avenue North Sngl Wall Curb Brooklyn Park, MN 55428 NAME DATE REV SIZE DWG. NO. Babcock RH BG3096 ShpDr Α DRAWN DWO 12/30/21 RELEASED DWO 12/30/21 WEIGHT: 356 LBS SHEET 1 OF 2

PROJECT:


ARCHITECT

CONTRACTOR:

QTY:

PART#:

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED. ©2020 BABCOCK-DAVIS

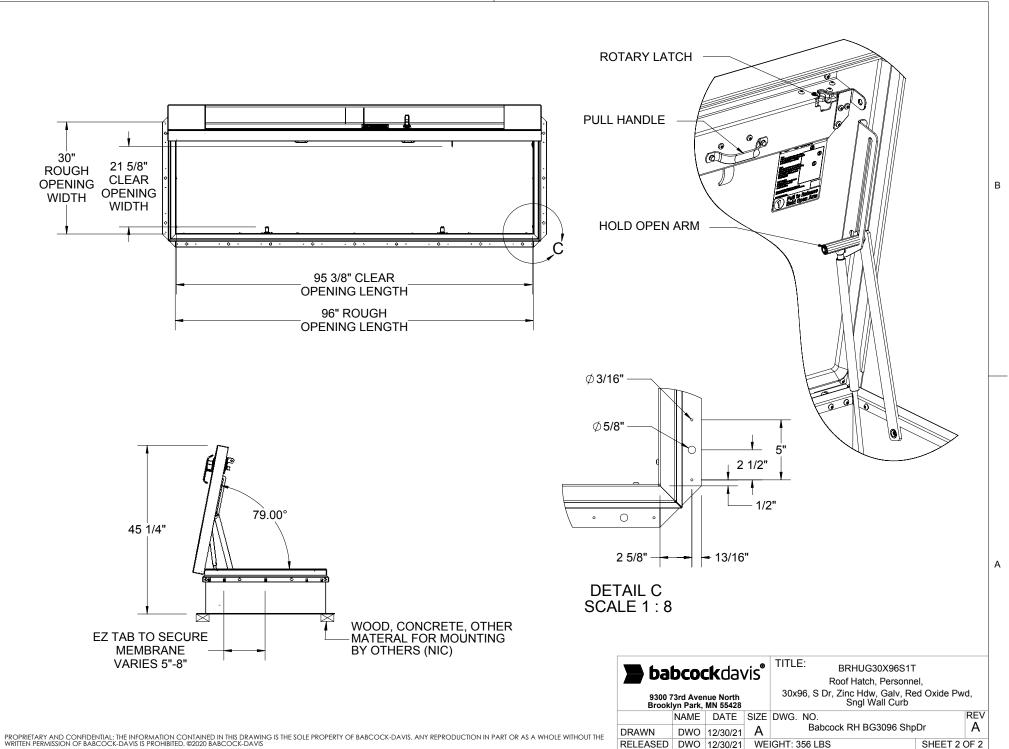

В